

## RECESSED MOUNT

### Specification


- ◀ Recessed Contact with Alnico magnet
- ◀ Jacked cable: 2,3,4,5 wires available
- ◀ Cable length: 2 meters,4 meters or longer
- ◀ Switch or magnet available separately
- ◀ Color: White, Brown or Grey

### BR-1023



### Dimension

(Unit:mm)

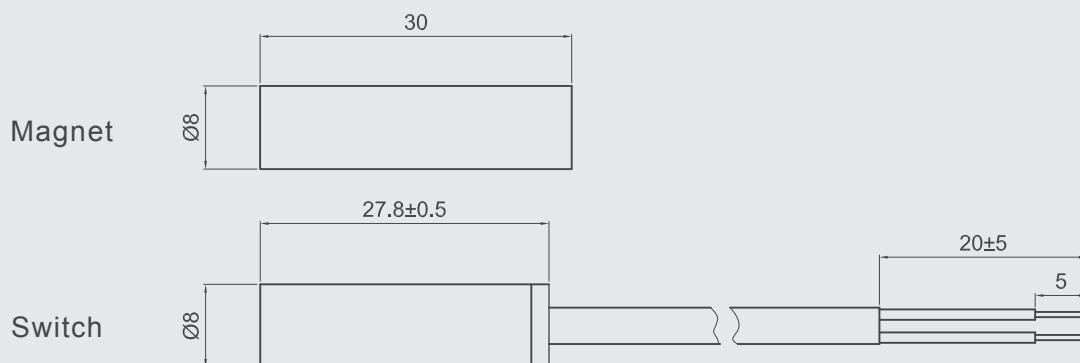

### Order Information

Part Number	Loop Type	Reed Form	Closed Gap [Inch(mm)]	Depature Gap [Inch(mm)]	Maximum Initial Contact Resistance (Ohm)	Maximum Contact Rating (W)	Maximum Switching Voltage (VDC /VAC)	Maximum Switching Current (A)	Certification
BR-1023-J-2M	Closed	N/O	1(25)	1.05(26)	0.65	10	100	0.5	
BR-1023-UJ-2M	Closed& Supervisory	N/C	1(25)	1.05(26)	0.65	10	100	0.5	
BR-1023A-J-2M	Open	N/C	1(25)		0.65	3	30	0.2	
BR-1023C-J-2M	Open/Closed	SPDT	1(25)		0.65	3	30	0.2	

**Notes:**

“J” mean 2 wires jacked cable

“UJ” mean 4wires jacked cable 2 wires for switch 2 wires for supevisory loop