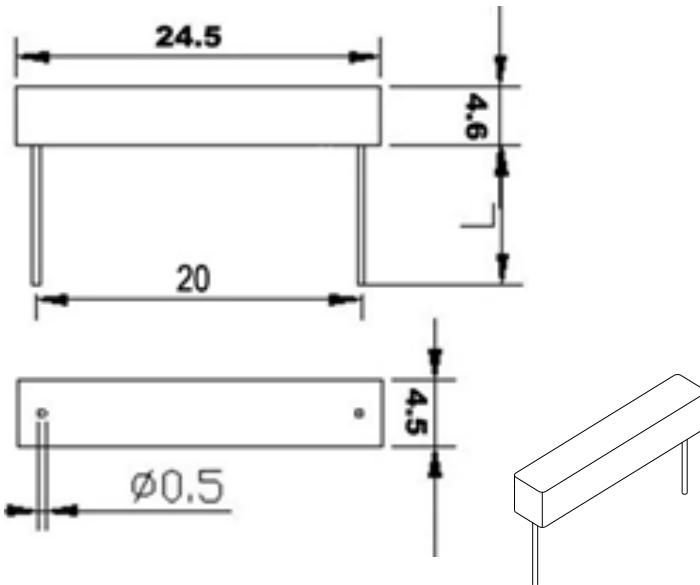
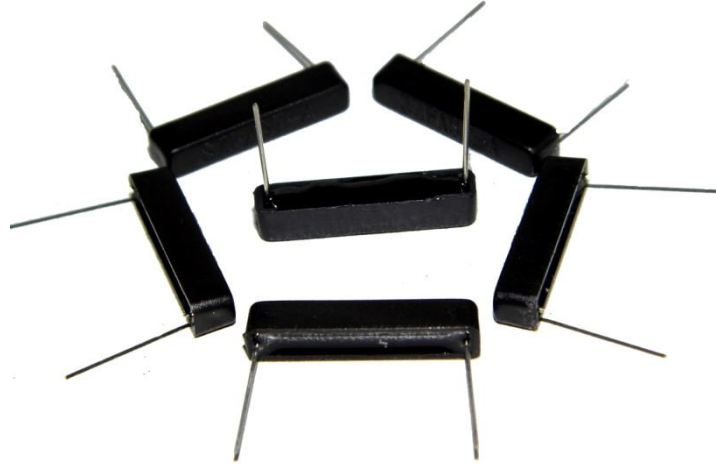



PCB Mount Reed Switch

Product Name		Normally Open Reed Sensor		Item No.		SZFAST-D	
							
Switch Circuit	Switch Form	Built-in reed switch		Feature:			
	Form A	RI-03 φ2.5×14.5mm		Advantages: 1. Easy installation. 2. Passive switch, no need outer power 3. It can cut through any non-irony materials.			
		RI-21 φ2.5×14.5mm					
		RI-25 φ2.5×14.5mm					
Contact Form		1A SPST-N/O		Breakdown voltage		200V	
Contact Materials		Ru		Contact capacity		0.3pF	
Contact Load		10W		Insulated resistance		10 ¹² Ω	
Max. switching voltage		DC200V/AC140V		resonant frequency		9KHz	
Max. switching current		0.5A		Work temperature		-55℃ ~ +100℃	
Max. contact resistance		120m Ω		Pull in value		AT10-15	
Approve		Drawing		check		version release	
ROHS\REACH\CE		Yan Guo		Leo Li		2012-1-30	
SHENZHEN FAST SENSOR CO.,LTD http://www.szfast.com				TEL: 0755-3393 6919 FAX: 0755-3393 6682 Sophy Deng E-mail: sophy@faster.hk			

<p>SZFAST-A</p> <p>NO</p> <p>20 18 4 L $\phi 0.5$ 3.8</p>	<p>SZFAST-B</p> <p>NO</p> <p>16.5 13.8 4 L $\phi 0.45$ 3.8</p>	<p>SZFAST-C</p> <p>NO</p> <p>23.5 21 3.8 L $\phi 0.5$ 4.2</p>	<p>SZFAST-D</p> <p>NO</p> <p>24.5 20 4.6 L $\phi 0.5$ 4.5</p>
<p>SZFAST-E</p> <p>NO</p> <p>33 30 4 L $\phi 0.65$ 4.6</p>	<p>SZFAST-EB</p> <p>NB</p> <p>33 30 4 9 $\phi 0.5$ 4.6</p>	<p>SZFAST-EC</p> <p>CO</p> <p>33 30 4 L $\phi 0.65$ 4.6</p>	<p>SZFAST-F</p> <p>NO</p> <p>12.4 10 4 L $\phi 0.42$ 4</p>
<p>SZFAST-G</p> <p>NO</p> <p>9.7 7.5 3.8 L $\phi 0.4$ 3.6</p>	<p>SZFAST-H</p> <p>NO</p> <p>46 6.2 2.2 L 2.2</p>	<p>SZFAST-J</p> <p>NO</p> <p>46 11.7 2.2 L 3.0</p>	<p>SZFAST-J1</p> <p>NO</p> <p>中心跨距22 ± 0.2 11.6 2.9 12 L 3.0</p>
<p>SZFAST-M</p> <p>NO</p> <p>46 8.7 2.8 L 2.8</p>	<p>SZFAST-R1105</p> <p>NO</p> <p>$\phi 5$ 11 2 L 2</p>	<p>SZFAST-R1503</p> <p>NO</p> <p>$\phi 3.5$ 15 2 L 2</p>	<p>SZFAST-R1505</p> <p>NO</p> <p>$\phi 5$ 15 2 L 2</p>