

SURFACE MOUNT

Specification


- ◀ 8 mm diameter switch with flange
- ◀ Flush mounting
- ◀ Compact dimensions for thin frames
- ◀ Copper body
- ◀ High mechanical resistance
- ◀ Wire: #22AWG 18" length
- ◀ Special wire or cable available upon request
- ◀ Suitable for aluminum, wood and PVC doors and windows

BS-2036




Dimension

(Unit:mm)

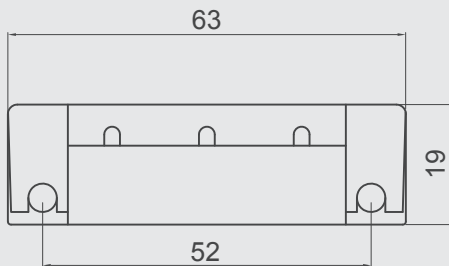

Switch

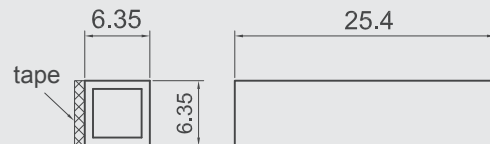

Magnet

Order Information

Part Number	Loop Type	Reed Form	Closed Gap [Inch(mm)]	Departure Gap [Inch(mm)]	Maximum Initial Contact Resistance (Ohm)	Maximum Contact Rating (W)	Maximum Switching Voltage (VDC/VAC)	Maximum Switching Current (A)	Certification
BS-2036	Closed	N/O	1(25)	1.05(27)	0.20	10	100	0.5	
BS-2036A	Open	N/C	7/8(22)		0.20	3	30	0.2	
BS-2036C	Open/Closed	SPDT	7/8(22)		0.20	3	30	0.2	