


PCB Mount Reed Switch

Product Name	Normally Open Reed Sensor	Item No.	SZFAST-H
---------------------	---------------------------	-----------------	----------

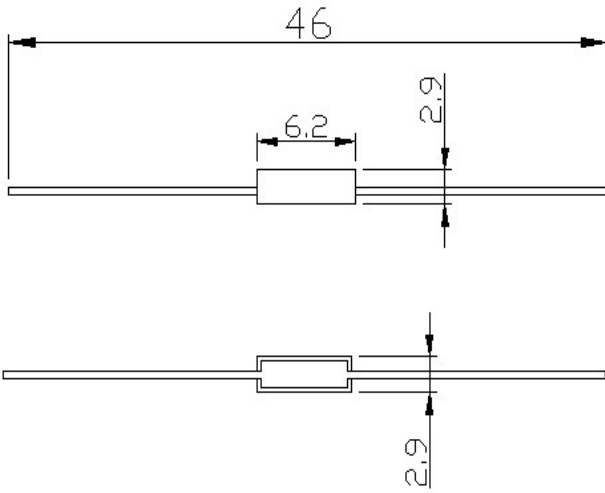

Switch Circuit	Switch Form	Built-in reed switch	Feature:
	Form A	RI-80 φ1.8×5mm	<ol style="list-style-type: none"> 1. Operated in magnetic field. 2. Sensitive distance is optional 3. 2 pins
		RI-80SMD φ1.8×5mm	Advantages: <ol style="list-style-type: none"> 1. Easy installation. 2. Passive switch, no need outer power 3. It can cut through any non-irony materials.

Contact Form	1A SPST-N0	Breakdown voltage	230V
Contact Materials	Ru	Contact capacity	0.45pF
Contact Load	5W	Insulated resistance	10 ¹² Ω
Max. switching voltage	DC200V/AC140V	resonant frequency	21.3KHz
Max. switching current	0.35A	Work temperature	-55°C ~ +100°C
Max. contact resistance	140m Ω	Pull in value	AT9-15
Approve	Drawing	check	version release
ROHS\REACH\ICE	Yan Guo	Leo Li	2012-1-30

SHENZHEN FAST SENSOR CO.,LTD	TEL: 0755-3393 6919 FAX: 0755-3393 6682 Sophy Deng E-mail: sophy@faster.hk
http://www.szfast.com	

<p>SZFAST-A</p> <p>NO</p>	<p>SZFAST-B</p> <p>NO</p>	<p>SZFAST-C</p> <p>NO</p>	<p>SZFAST-D</p> <p>NO</p>
<p>SZFAST-E</p> <p>NO</p>	<p>SZFAST-EB</p> <p>NB</p>	<p>SZFAST-EC</p> <p>CO</p>	<p>SZFAST-F</p> <p>NO</p>
<p>SZFAST-G</p> <p>NO</p>	<p>SZFAST-H</p> <p>NO</p>	<p>SZFAST-J</p> <p>NO</p>	<p>SZFAST-J1</p> <p>NO</p>
<p>SZFAST-M</p> <p>NO</p>	<p>SZFAST-R1105</p> <p>NO</p>	<p>SZFAST-R1503</p> <p>NO</p>	<p>SZFAST-R1505</p> <p>NO</p>