
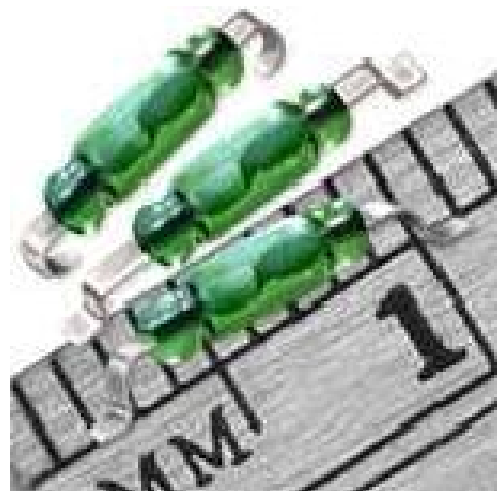


PCB Mount Reed Switch

Product Name	Normally Open Reed Switch	Item No.	RI-02SMD
---------------------	---------------------------	-----------------	----------

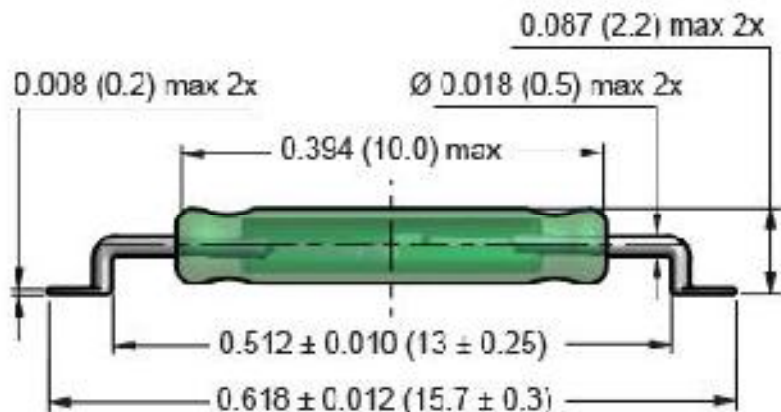

Switch Circuit	Switch Form	Built-in reed switch	Feature:
	Form A	RI-02SMD φ1.8×10mm	<ol style="list-style-type: none"> 1. Operated in magnetic field. 2. Sensitive distance is optional 3. 2 pins
			Advantages: <ol style="list-style-type: none"> 1. Easy installation. 2. Passive switch, no need outer power 3. It can cut through any non-irony materials.

Contact Form	1A SPST-NO	Breakdown voltage	200-230V
Contact Materials	Ru	Contact capacity	0.3pF
Contact Load	10W	Insulated resistance	10 ¹² Ω
Max. switching voltage	DC200V/AC140V	resonant frequency	10.8KHz
Max. switching current	0.5A	Work temperature	-55℃~+120℃
Max. contact resistance	150mΩ	Pull in value	AT9-15
Approve	Drawing	check	version release
ROHS\REACH\CE	Yan Guo	Leo Li	2012-1-30

SHENZHEN FAST SENSOR CO.,LTD http://www.szfast.com	TEL: 0755-3393 6919 FAX: 0755-3393 6682 Sophy Deng E-mail: sophy@faster.hk
-----------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------