
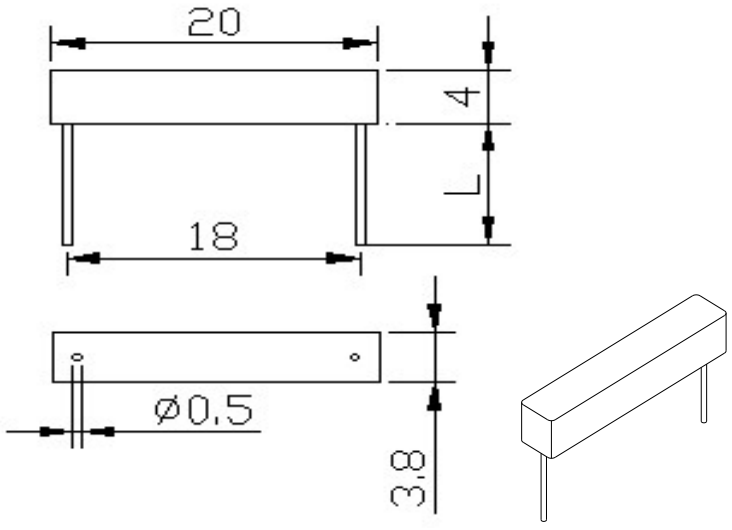
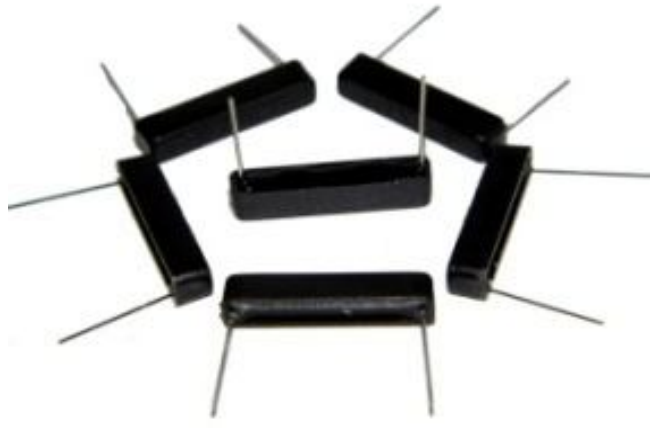



PCB Mount Reed Switch

Product Name		Normally Open Reed Sensor		Item No.		SZFAST-A 	
							
Switch Circuit	Switch Form	Built-in reed switch		Feature:			
	Form A	FLEX-14 φ2.2×14mm		1. Operated in magnetic field.			
		MKA-14103 φ2.2×14mm		2. Sensitive distance is optional			
		RI-29 φ1.8×13mm		3. 2 pins			
				Advantages:			
				1. Easy installation.			
				2. Passive switch, no need outer power			
				3. It can cut through any non-irony materials.			
Contact Form		1A SPST-N/O		Breakdown voltage		250V	
Contact Materials		Ru		Contact capacity		0.25pF	
Contact Load		10W		Insulated resistance		10 ¹² Ω	
Max. switching voltage		DC200V/AC140V		resonant frequency		9KHz	
Max. switching current		0.5A		Work temperature		-55℃ ~ +100℃	
Max. contact resistance		100m Ω		Pull in value		AT10-15	
Approve		Drawing		check		version release	
ROHS\REACH\CE		Yan Guo		Leo Li		2012-1-30	
SHENZHEN FAST SENSOR CO.,LTD http://www.szfast.com				TEL: 0755-3393 6919 FAX: 0755-3393 6682 Sophy Deng E-mail: sophy@faster.hk			

<p>SZFAST-A</p> <p>NO</p>	<p>SZFAST-B</p> <p>NO</p>	<p>SZFAST-C</p> <p>NO</p>	<p>SZFAST-D</p> <p>NO</p>
<p>SZFAST-E</p> <p>NO</p>	<p>SZFAST-EB</p> <p>NB</p>	<p>SZFAST-EC</p> <p>CO</p>	<p>SZFAST-F</p> <p>NO</p>
<p>SZFAST-G</p> <p>NO</p>	<p>SZFAST-H</p> <p>NO</p>	<p>SZFAST-J</p> <p>NO</p>	<p>SZFAST-J1</p> <p>NO</p>
<p>SZFAST-M</p> <p>NO</p>	<p>SZFAST-R1105</p> <p>NO</p>	<p>SZFAST-R1503</p> <p>NO</p>	<p>SZFAST-R1505</p> <p>NO</p>