規格承認書

SPECIFICATION FOR APPROVAL

客戶料號: (PART NO) _______

品名規格: DFB401024H

送樣日期: 2009-9-8

客戶簽章: SIGNATURE	永林興電子(深圳)有限公司制作				
	审 核: REPORTED BY	确 认: CHECKBY	作成: APPROVED BY		
	周向阳	吴明峰	周园		

敬請"客戶簽章"欄簽核後將零件承認書回傳永林與公司,以便後續作業,謝謝!



Y L TECH(HK)CO.

永林興科技有限公司 YOUNG LIN TECH CO.,LTD.

致宣電子深圳有限公司 ZHI XUAN ELECTRONICS(SHENZHEN)CO.,LTD.

永林興電子(深圳)有限公司 YONG LIN XING ELECTRONICS(SHENZHEN)CO.,LTD. IS09001 (2000) IS014001 CERTIFIED SUPPLIER

Writing https://www.yitc.cn


SPECIFICATION FOR APPROVAL

IO: IM&F	SAMPLE ISSUE NO.: YLM0090915-1	
MODEL: DFB401024H	SAMPLE ISSUE DATE: 2009-9-8	
PART_NAME: DC_FAN(RoHS)	SAMPLE Q' TY: 10PCS	
	REV: 0	
1. SCOPE:		
THIS SPECIFICATION DEFINES TH	HE ELECTRICAL AND MECHANICAL	
CHARACTERISTICS OF THE DC B	RUSHLESS FAN.THE FAN	
MOTOR IS WITH TWO PHASES AN	ND FOUR POLES.	
2. CHARACTERS:		
 	DESCRIPTION	
RATED VOLTAGE	24VDC	
OPERATION VOLTAGE	17~28VDC	
STARTING VOLTAGE	17VDC(ON/OFF)	
INPUT CURRENT	0.04 ± 0.02 A	
SPEED (10 MINUTE/ ROOM TEMPERATURE 25°C) AIR FLOW	6000 RPM <u>+</u> 15%	
(AT ZERO STATIC PRESSURE) AIR PRESSURE		
(AT ZERO AIRFLOW)		
ACOUSTICAL NOISE (AVG.)	26.26dB-A	
SAFETY TYPE		
(Continu Page:	•	

YOUNG LIN TECH CO., LTD. MODEL: DFB401024H INSULATION STRENGTH 10 MEG OHM MIN.AT 500 VDC (BETWEEN FRAME AND (+) TERMINAL) DIELECTRIC STRENGTH 5 mA MAX. AT 500 VAC 60 Hz ONE MINUTE, (BETWEEN FRAME AND (+) TERMINAL) LIFE EXPECTANCE 50,000 HOURS CONTINUOUS OPERATION AT 25℃ WITH 15~65 %RH. **ROTATION** WIDDERSHINS VIEW FROM FRAME PLATE SIDE OVER CURRENT SHUT DOWN THE CURRENT WILL SHUT DOWN WHEN LOCKING ROTOR. LEAD WIRE UL 1007 - AWG #26 **BLACK BLACK: (-)** RED RED: (+)

NOTES: 1. ALL READINGS ARE MEASURED AFTER STABLY WARMING UP THROUGH 10 MINUTES.

- 2. THE VALUES WRITTEN IN PARENS, ARE LIMITED SPEC.
- 3. ACOUSTICAL NOISE MEASURING CONDITION:

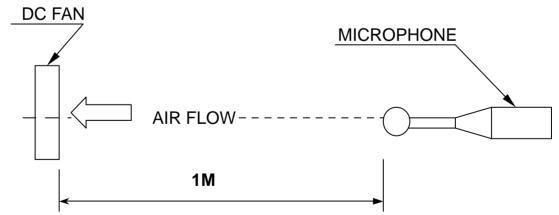

NOISE IS MEASURED AT RATED VOLTAGE IN FREE AIR IN ANECHOIC CHAMBER WITH B & K SOUND LEVEL METER WITH MICROPHONE AT A DISTANCE OF ONE METER FROM THE FAN INTAKE

Page: 2

YOUNG LIN TECH CO., LTD,	
MODEL: <u>DFB401024H</u>	
3. MECHANICAL:	
3-2. FRAME— — — — — — — 3-3. IMPELLER — — — — 3-4. BEARING SYSTEM —	
4. ENVIRONMENTAL:	
4.2. STORAGE TEMPERAT 4-3. OPERATING HUMIDIT	ATURE- — — — — — —10 TO + 70 DEGREE C TURE- — — — — — —40 TO + 75 DEGREE C Y — — — — — — — — — 5 TO 90 % RH — — — — — — — — 5 TO 95% RH
5. PROTECTION:	
	NG CONDITION FAN WITHSTANDS EACH ONE ES FROM 30 CM DISTANCE HEIGHT ONTO 10 MM DEN BOARD.

6. RE OZONE DEPLETING SUBSTANCES;

5-2. LOCKED ROTOR PROTECTION

6-1.RESTRICTION SUBSTANCES OF SAMPLE ARE AS FOLLOWS: Pb(PPM) < 1000 Cd(PPM) < 1000 Hg(PPM) < 1000 Cr6+ (PPM) < 1000 PBBs (PPM) < 1000 PBDEs (PPM) < 1000

IMPEDANCE OF MOTOR WINDING PROTECTS MOTOR FROM FIRE IN 15

MINUTE OF LOCKED ROTOR CONDITION AT THE RATED VOLTAGE.

	Research & Development Department		
YLTC	Approved BY:	Checked BY:	Prepared BY:
	周向阳	吴明峰	周园

Page: 3

IMPORTANT NOTES & GENERAL INSTRUCTIONS

- Any item which is needed to add into specification shall be determined on customer's prior written request. If no information given , fan will be delivered based on our standard judgment.
- 2. Customer shall confirm the matching and reliability of fan on actual set or unit application.

This include confirmation on set or unit life, electrical noise, mechanical noise, Vibration static electricity, electric power noise, drift, electric resonance between motor and control circuit, mechanical resonance between motor and chassis, irregular movement of set due to motor noise, irregular movement of set in strong electromagnetic field, damaged by lightning surge earthing method etc


- 3. In order to improve the performance within the scope of specification, parts or material changes are subject to prior notice to customer.
- 4. Any revisions on the specification shall be done based on mutual discussion and agreement.
- 5. When any trouble occurs, both parties shall discuss on this specification to solve the matters. In this case, our guarantee is only limited to fans

Page: 4


風扇使用注意事項




HOW TO HANDLE FAN PROPERLY?




- 1. 取用風扇, 輕取外框兩側, 不可拉扯導線。
- 1. Hold the fan by frame side.
 Do not hold lead wires to
 support the fan.



- 2. 取用風扇, 不可碰觸或擠壓扇葉與外框.
- No touching or pressing on the impeller hub.Avoid crushing the frame side.



- 3. 風扇巖禁掉落地面,或敲擊外框任何面.
- 3. Do not drop on the ground.
 Do not pound on the frame side.





- 4. 風扇電源需依照規格電壓安裝使用.
- 4. Connect leads priperly and applty voltage according to specification.

