
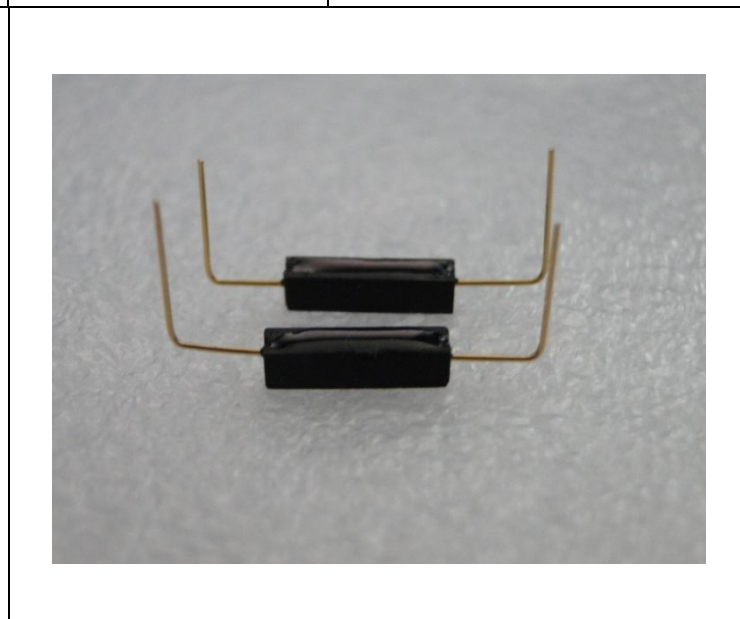


# PCB Mount Reed Switch

<b>Product Name</b>	Normally Open Reed Sensor	<b>Item No.</b>	SZFAST-J1
---------------------	---------------------------	-----------------	-----------

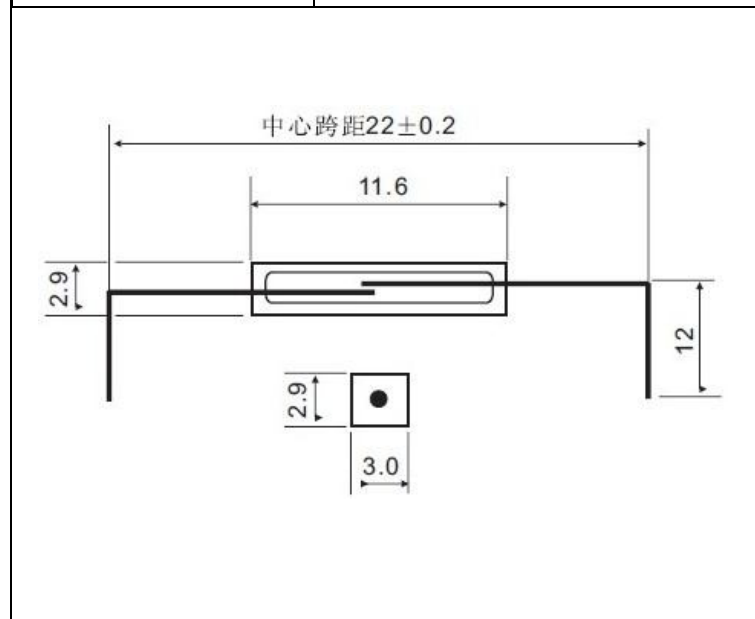

<b>Switch Circuit</b>	<b>Switch Form</b>	<b>Built-in reed switch</b>	<b>Feature:</b>
	Form A	MKA10110 φ1.8×10mm	<ol style="list-style-type: none"> <li>1. Operated in magnetic field.</li> <li>2. Sensitive distance is optional</li> <li>3. 2 pins</li> </ol>
		RI-02SFA φ1.8×10mm	<b>Advantages:</b> <ol style="list-style-type: none"> <li>1. Easy installation.</li> <li>2. Passive switch, no need outer power</li> <li>3. It can cut through any non-irony materials.</li> </ol>

<b>Contact Form</b>	1A SPST-N0	<b>Breakdown voltage</b>	200V
<b>Contact Materials</b>	Ru	<b>Contact capacity</b>	0.3pF
<b>Contact Load</b>	10W	<b>Insulated resistance</b>	10 <sup>12</sup> Ω
<b>Max. switching voltage</b>	DC200V/AC140V	<b>resonant frequency</b>	10.8KHz
<b>Max. switching current</b>	0.5A	<b>Work temperature</b>	-55°C ~ +100°C
<b>Max. contact resistance</b>	120m Ω	<b>Pull in value</b>	AT9-25
<b>Approve</b>	<b>Drawing</b>	<b>check</b>	<b>version release</b>
<b>ROHS\REACH\ICE</b>	Yan Guo	Leo Li	2012-1-30

<b>SHENZHEN FAST SENSOR CO.,LTD</b>	<b>TEL: 0755-3393 6919</b> <b>FAX: 0755-3393 6682</b> <b>Sophy Deng      E-mail: sophy@faster.hk</b>
<a href="http://www.szfast.com">http://www.szfast.com</a>	

<p><b>SZFAST-A</b></p> <p>NO</p> <p>20</p> <p>18</p> <p>4</p> <p>L</p> <p>3.8</p> <p><math>\phi 0.5</math></p>	<p><b>SZFAST-B</b></p> <p>NO</p> <p>16.5</p> <p>13.8</p> <p>4</p> <p>L</p> <p>3.8</p> <p><math>\phi 0.45</math></p>	<p><b>SZFAST-C</b></p> <p>NO</p> <p>23.5</p> <p>21</p> <p>3.8</p> <p>L</p> <p>4.2</p> <p><math>\phi 0.5</math></p>	<p><b>SZFAST-D</b></p> <p>NO</p> <p>24.5</p> <p>20</p> <p>4.6</p> <p>L</p> <p>4.5</p> <p><math>\phi 0.5</math></p>
<p><b>SZFAST-E</b></p> <p>NO</p> <p>33</p> <p>30</p> <p>4</p> <p>L</p> <p>4.6</p> <p><math>\phi 0.65</math></p>	<p><b>SZFAST-EB</b></p> <p>NB</p> <p>33</p> <p>30</p> <p>4</p> <p>9</p> <p>L</p> <p>4.6</p> <p><math>\phi 0.5</math></p>	<p><b>SZFAST-EC</b></p> <p>CO</p> <p>33</p> <p>30</p> <p>4</p> <p>L</p> <p>4.6</p> <p><math>\phi 0.65</math></p>	<p><b>SZFAST-F</b></p> <p>NO</p> <p>12.4</p> <p>10</p> <p>4</p> <p>L</p> <p>4</p> <p><math>\phi 0.42</math></p>
<p><b>SZFAST-G</b></p> <p>NO</p> <p>9.7</p> <p>7.5</p> <p>3.8</p> <p>L</p> <p>3.6</p> <p><math>\phi 0.4</math></p>	<p><b>SZFAST-H</b></p> <p>NO</p> <p>46</p> <p>6.2</p> <p>2.2</p> <p>L</p> <p>2.2</p>	<p><b>SZFAST-J</b></p> <p>NO</p> <p>46</p> <p>11.7</p> <p>2.2</p> <p>L</p> <p>3.0</p>	<p><b>SZFAST-J1</b></p> <p>NO</p> <p>中心跨距<math>22 \pm 0.2</math></p> <p>11.6</p> <p>2.9</p> <p>12</p> <p>2.9</p> <p>3.0</p>
<p><b>SZFAST-M</b></p> <p>NO</p> <p>46</p> <p>8.7</p> <p>2.8</p> <p>L</p> <p>2.8</p>	<p><b>SZFAST-R1105</b></p> <p>NO</p> <p><math>\phi 5</math></p> <p>11</p> <p>2</p> <p>L</p>	<p><b>SZFAST-R1503</b></p> <p>NO</p> <p><math>\phi 3.5</math></p> <p>15</p> <p>2</p> <p>L</p>	<p><b>SZFAST-R1505</b></p> <p>NO</p> <p><math>\phi 5</math></p> <p>15</p> <p>2</p> <p>L</p>