


## RI-01C SMD Series Dry Reed Switch

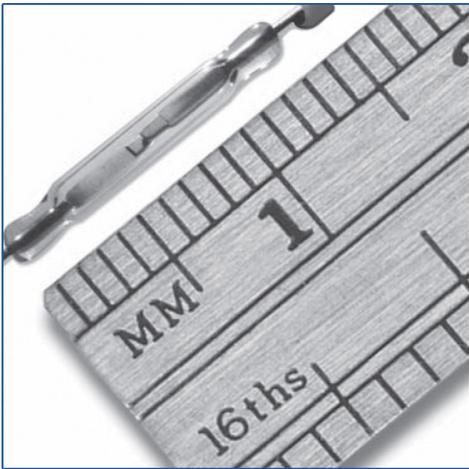

### RI-01C SMD Series



Pico dry-reed switch hermetically sealed in a gas-filled envelope. Single-pole, single-throw (SPST) type, having normally open contacts, and containing two magnetically actuated reeds.

The switch is of the double-ended type and may be actuated by an electro-magnet, a permanent magnet or combination of both. The device is intended for use in sensors, relays, pulse counters or similar devices.

### RI-01C SMD Series Features

- Ideal for general purpose reed relays and sensors.
- Contact layers: ruthenium on gold
- Superior glass-to-metal seal and blade alignment
- RoHS Compliant

### Dimensions for RI-01C SMD Series *All Dimension in inches (mm) nominal*

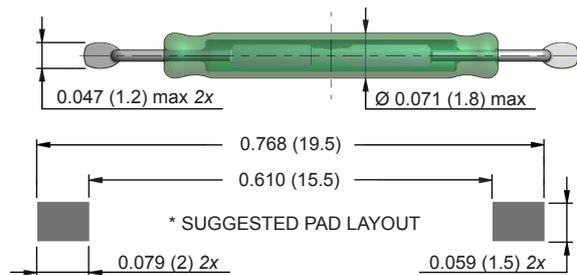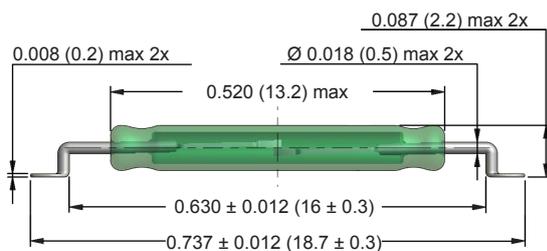

\* For other pad layouts please contact us.

### Technical Specifications


Parameters	Test Conditions	Units	RI-01C
<b>Operating Characteristics</b>			
Operate Range		AT	7-25
Release Range		AT	3 (min)
Operate Time - including Bounce (typ.)		ms	0.30
Bounce Time (typ.)		ms	0.10
Release Time (max)		µs	50
Resonant Frequency (typ.)		Hz	6700
<b>Electrical Characteristics</b>			
Switched Power (max)		W	10
Switched Voltage DC (max)		V	180
Switched Voltage AC, RMS value (max)		V	130
Switched Current DC (max)		mA	250
Switched Current AC, RMS value (max)		mA	250
Carry Current DC (max)		A	1.5
Breakdown Voltage (min)		V	180
*Contact Resistance (initial max.)		mΩ	100
*Contact Resistance (initial typ.)		mΩ	80
Contact Capacitance (max)	without test coil	pF	0.3
Insulation Resistance (min)	RH ≤ 45%	MΩ	10 <sup>6</sup>

\* The Contact Resistance is measured using the Kelvin Method next to the glass body.

# RI-01C SMD Series Dry Reed Switch

## Based on standard RI-01C models

### ORDERING INFORMATION

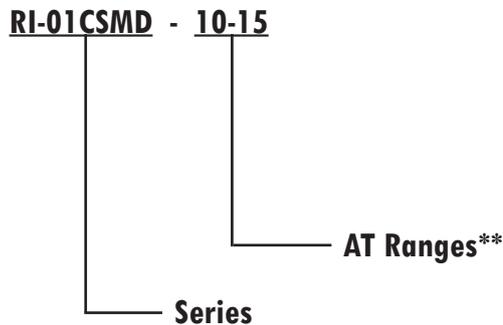

*\*\*Customer specific AT ranges are possible. Please contact your local sales representative.*

### Coils

All characteristics are measured using the Philips Standard Coil. For definitions of the Philips Standard Coil, refer to “Application Notes” in the *Reed Switch Technical & Application Information* Section of this catalog.

### Life expectancy and reliability

The life expectancy data given below are valid for a coil energized at 1.25 times the published maximum operate value for each type in the RI-01C series.

#### No load conditions (operating frequency: 100Hz)

Life expectancy: min.  $10^8$  operations with a failure rate of less than  $10^{-9}$  with a confidence level of 90%.

End of life criteria:

- Contact resistance >  $1\Omega$  after 2 ms
- Release time > 2 ms (latching or contact sticking).

#### Loaded conditions (resistive load: 12V; 4 mA; (15 mA peak); operating frequency: 170Hz)

Life expectancy: min.  $10^6$  operations.

End of life criteria:

- Contact resistance >  $2\Omega$  after 4 ms
- Release time > 0.7 ms (latching or contact sticking).

Switching different loads involves different life expectancy and reliability data. Further information is available on request.

### Mechanical Data

Contact arrangement is normally open; lead finish is tinned; net mass is approximately 100mg; and can be mounted in any position.

### Shock

The switches are tested in accordance with “IEC 68-2-27”, test Ea (peak acceleration 150 G; half sinewave; duration

11ms). Such a shock will not cause an open switch (no magnetic field present) to close, nor a switch kept closed by an 80 AT coil to open.

### Vibration

The switches are tested in accordance with “IEC 68-2-6”, test Fc (acceleration 10G; below cross-over-frequency 57 to 62 Hz; amplitude 0.75 mm; frequency range 10 to 2000 Hz; duration 90 minutes.) Such a vibration will not cause an open switch (no magnetic field present) to close, nor a switch kept closed by an 80 AT coil to open.

### Mechanical Strength

The robustness of the terminations is tested in accordance with “IEC 68-2-21”, test Ua1 (load 10 N).

### Operating and Storage Temperature

Operating ambient temperature; min:  $-55^{\circ}\text{C}$ ; max:  $+125^{\circ}\text{C}$ . Storage temperature; min:  $-55^{\circ}\text{C}$ ; max:  $+125^{\circ}\text{C}$ . Note: Temperature excursions up to  $150^{\circ}\text{C}$  may be permissible. For more information contact your nearest Comus Group sales office.

### Soldering

The switch can withstand soldering heat in accordance with “IEC 68-2-20”, test Tb, method 1B: solder bath at  $350 \pm 10^{\circ}\text{C}$  for  $3.5 \pm 0.5$  s. Solderability is tested in accordance with “IEC 68-2-20” test Ta, method 3: solder globule temperature  $235^{\circ}\text{C}$ ; ageing 1b: 4 hours steam.

### Through-hole Reed Switches

The attachment method is typically eutectic soldering. RoHS requires solder with no elemental lead (Pb). SAC alloy (96,5Sn / 3AG / 0,5Cu) is the most popular choice. Reed switches can be soldered by hand or by wave solder processing. Comus Technology recommends the maximum wave solder temperature (measured at the reed switch leads) as  $270^{\circ}\text{C}$  for 10 seconds. Temperature and time in excess of the recommended levels may result in damage to the reed switch. All of our through-hole reed switches will be compatible with either SAC alloy or eutectic soldering process.

### Surface Mounted Reed Switches


The most common method of attachment is by SMD processing - stencil/screen solder paste, then oven reflow. Due to board thickness, component density, and other circumstances that dictate the required reflow temperature, Comus Technology uses a higher temperature solder for all internal connections. We recommend that the temperature (measured at the reed switch leads) does not exceed  $260^{\circ}\text{C}$  for 1 minute. Temperature and time in excess of the recommended levels may result in damage to the reed switch.

# RI-01C SMD Series Dry Reed Switch


## Handling Force

When possible don't add pressure on the glass on placing the reed switch on a pcb or device. However when handling with a Pick and Place machine the acceptable force on the reed switch is 3N with a max of 5N.

\* As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

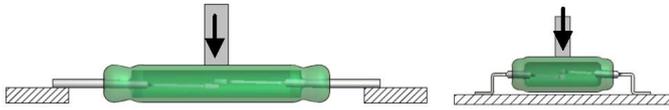


## Recommended Soldering Reflow Profile

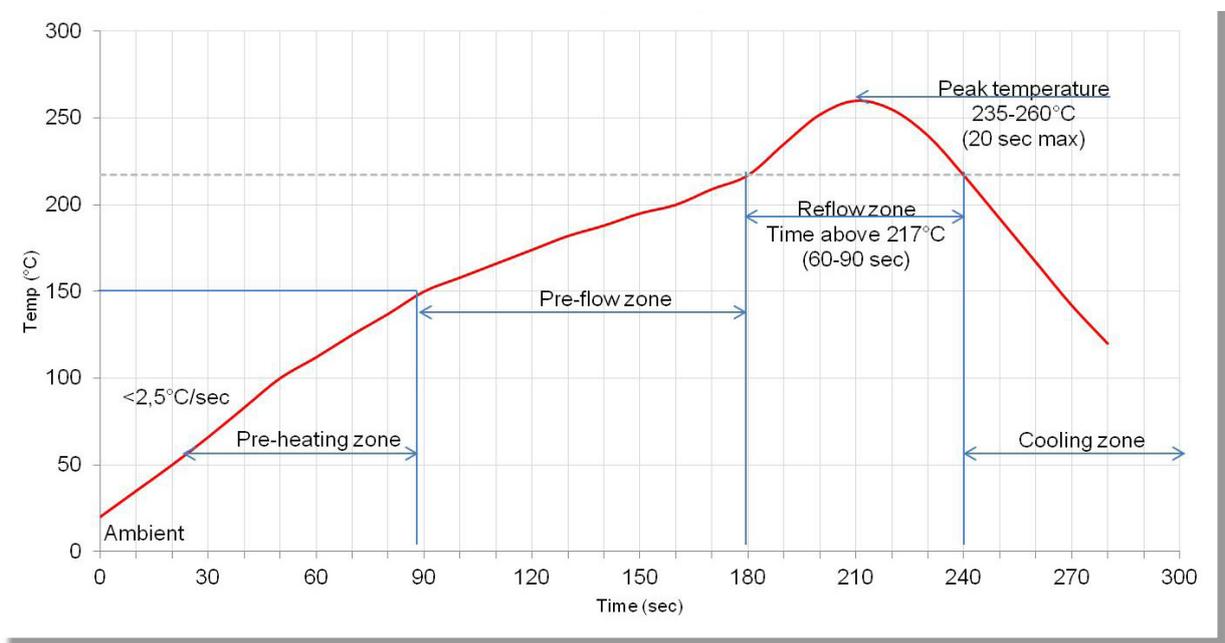

## Dimensions for RI-01C SMD Tape and Reel

All Dimension in inches (mm) nominal

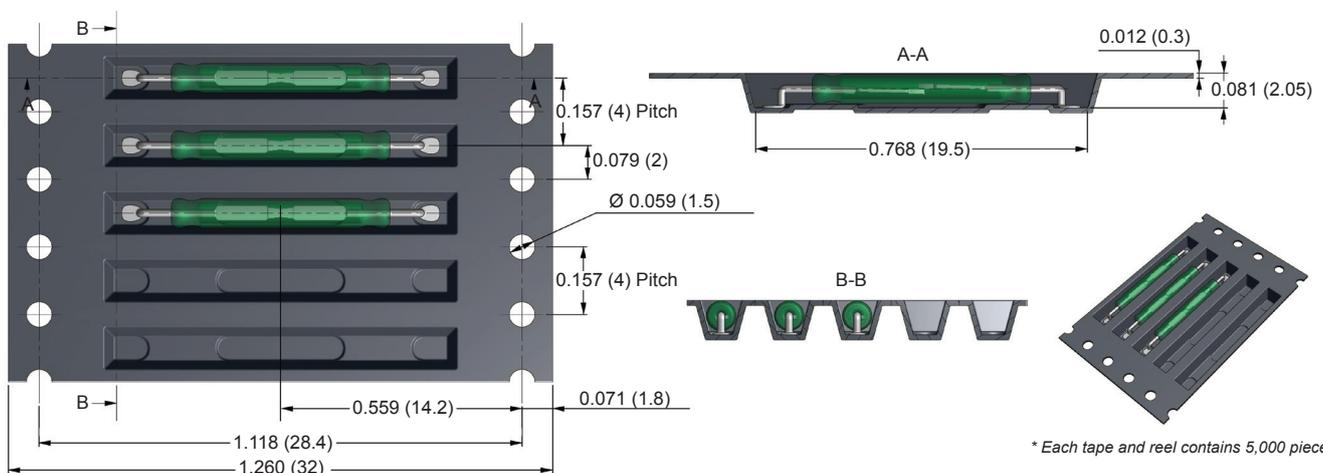

\* Each tape and reel contains 5,000 pieces.

# RI-01C SMD Series Dry Reed Switch



Comus International  
454 Allwood Road  
Clifton, New Jersey 07012  
U.S.A

Tel: (1)973 - 777 - 6900  
Fax: (1)973 - 777 - 8405  
email: [info@comus-intl.com](mailto:info@comus-intl.com)  
Website: <http://www.comus-intl.com>  
ISO 9001:2008  
CERTIFICATE NO: 03-12314



Comus Europe Ltd  
Unit 7, Rice Bridge Industrial Estate  
Thorpe - Le - Soken  
Essex, England  
CO160HL

Tel: +44 (0)1255 862236  
Fax: +44 (0)1255 862014  
email: [sales@comuseurope.co.uk](mailto:sales@comuseurope.co.uk)  
Website: <http://www.comuseurope.co.uk>  
ISO 9001:2008  
CERTIFICATE NO: FM 21080



Comus Belgium BVBA  
Overhaamlaan 40  
B-3700 Tongeren  
Belgium

Tel: +33 (0)12 390400  
Fax: +33 (0)12 235754  
email: [info@comus.be](mailto:info@comus.be)  
Website: <http://www.comus.be>



Comus Technology BV  
Jan Campertstraat 11  
6416 SG Heerlen  
The Netherlands

Tel: +31(0)45 5439345  
Fax: +31(0)45 5427216  
email: [info@comus-intl.com](mailto:info@comus-intl.com)  
Website: <http://www.dry-reeds.com>



Comus Electronics and Technologies  
India Private Limited  
2nd Floor, No.31/33, Anjugam Nagar  
2nd Street, Ashok Nagar, Jaferkhanpet  
Chennai 600083

Tamil Nadu, India  
Tel:+(91)-(44)-42023510  
Fax:+(91)-(44)-22628198  
email: [info@comus-intl.com](mailto:info@comus-intl.com)  
Website: <http://www.comusindia.com>

## TAKE A LOOK AT OUR VARIETY OF PRODUCTS



Float Switches



Acceleration / Shock Switches



Movement Sensors



Tilt / Tip Switches



Reed Relays



Solid State Relays



High Breakdown Switches



Reed Switches



Magnets



Smart Sensors



Optical Level Switches



Alarm / Security Switches